Wireless/Wired USB Hi-Speed 11g Print Server Canon C-6700WG

Ideal for

Canon PIXMA Ink-Jet	Canon imageCLASS CAPT Laser printers	Canon PIXMA Multi-Function printers

Ideal for sharing Canon Multi-Function and USB printers

The C-6700WG provides convenience and flexibility to share your Canon Multi-function and USB-printer on a Wireless or Wired Local Area Network.

Like the rest of SILEXs C-Series products, the C-6700WG is developed in close association with Canon.

Enjoy all functions of your Canon printers over the network - as if they were locally connected.

Key features

- Printing, scanning, memory card storing and PC fax over a Wireless Local Area Network or LAN
- Compatible with most Canon Multi-Function and USB printers
- Easy wireless configuration with Windows® Connect Now support
- Canon printer status monitoring support

Ideal for sharing Canon Multi-Function and USB printers

Features and benefits

Convert your Canon MFP and printers to a shared network resource

With the C-6700WG, you can remotely share a Canon USB MFP/printer over the network while at home with your familiy members or at the office with co-workers.

Network printing, scanning, memory card sharing and PC fax.

The C-6700WG provides easy wireless network access with full funcionalities of the compatible Canon device.

Real-time Canon printer status monitoring support

The convenience of the Canon status monitoring function is available on the network as if it was locally connected to your PC. You can remotely monitor various defined printer operating conditions such as ink levels and paper empty on a real-time basis.

PIXMA All-In-One Printer



▲ Printing

▲ Ink cartridge empty/ Paper out

CAPT Supported Laser Printers

▲ Printing

▲ Paper out

Easy wireless configuration with Microsoft Windows Connect Now*

The C-6700WG supports Microsoft Windows Connect Now. It simplifies the complicated wireless network initial configuration. The process is very easy. Use the Windows XP Connect Now wizard, save the results on your USB flash thumb drive, and then insert the thumb drive to the C-6700WG. It automatically creates the wireless configuration instantly. Alternatively, the C-6700WG can be configured over a wired LAN connection.

* Supported only with Windows XP Service Pack 2 or greater

Advanced Wireless Security Support

64/128 WEP is supported as well as WPA-PSK (TKIP/AES) to securely print, scan or store your data over the wireless network.

Network diagramm

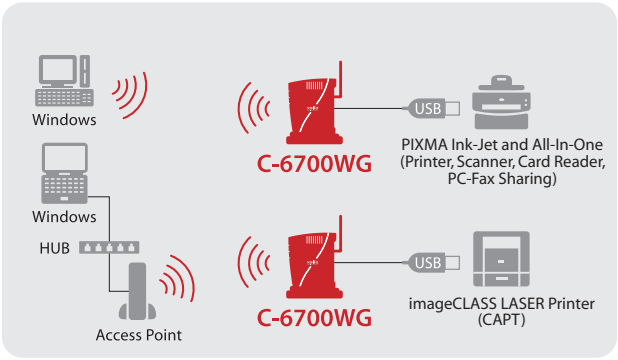

Specifications

Wireless LAN	IEEE 802.11b/g
Wireless Security	WEP (64/128bit), SSID, WPA-PSK (TKIP/AES)
Wired LAN	10Base-T, 100Base-TX (Auto Sense)
USB Interface	USB2.0 Hi-Speed (A type) x 1
Operating Systems*	Windows 95/98/Me, Windows 2000/XP, Windows Server 2003
Supported Protocols	TCP/IP
Configuration	Setup Utility, Web Setup, TELNET, Windows Connect Now
Outer Dimentions	W: 36mm x D: 114mm x H: 138mm W: 1.42 x D: 4.49 x H: 5.43 in (Antenna and Stand not included)
Weight	172g / 5.55 oz (Antenna and Stand not included)
Power	AC Power Adapter, AC100-240V 50/60Hz
Power Consumption	Max 9W (DC5V 1.8A)
Content	C-6700WG, AC Power Adapter, CD-ROM (Setup Utility, Manual) Setup Guide, Warranty Card, Stand, Antenna

*) Network scanning, memory card reading and PC-Fax are available only for Windows 2000/XP.

Utility Software

Device Server Setup	Wizard style quick setup utility
CX Print	Client Software for Windows Printing
SX Virtual Link	For networking USB devices

ISO 9001 JQA-QMA2667 silex technology,Inc.

ISO 14001 JQA-EM3813 silex technology,Inc. Design & Manufacture Center

Canon® is a registered trademark of Canon IncSILEX TECHNOLOGY is a registered trademark of SILEX TECHNOLOGY, Inc. Other company or product names may be trademarks or registered trademarks of their respective owners. Technical information and specifications are subject to change without notice. © 2008 SILEX TECHNOLOGY EUROPE GmbH. All rights reserved.

Global sales & support:

Europe Office
SILEX TECHNOLOGY EUROPE GmbH
+49-2159-6750-10
Cost-free Hotline Germany:
0800-7453938 (SILEX EU)
www.silexeurope.com
> contact@silexeurope.com

Corporate Headquarters
SILEX TECHNOLOGY, Inc.
+81-774-98-3782
www.silex.jp
> support@silex.jp

US Office
SILEX TECHNOLOGY AMERICA, Inc.
+1-801-747-0656
Cost-free Hotline USA:
866-765-8761
www.silexamerica.com
> contact@silexamerica.com

China Office
SILEX TECHNOLOGY BEIJING, Inc.
+86-10-8497-1430
www.silex.com.cn
> contact@silex.com.cn

SX-2000U2

! New - Print Server Functionality !

Hi-Speed USB Device Server

Provides Local Area Network Connectivity for USB 2.0 Hi-Speed Devices

Affordably turn your scanner & storage devices into a shared resource

Features & benefits

- **Convert your USB 2.0 Hi-Speed devices to a shared Local Area Network resource.** The Hi-Speed USB device server provides fast Ethernet connectivity for your 2.0 Hi-Speed devices, instantly making it accessible anywhere on your LAN. The USB 2.0 Hi-Speed interface support assures seamless data transfer, thus it is most ideal for sharing a USB scanner and storage device on your existing LAN.

- **Versatile, flexible and intuitive networkability with almost any USB devices.** The Hi-Speed USB device server allows the business or home user to improve productivity and save money by sharing a USB device among multiple LAN users. Examples of supported devices are Multi-Function or All-In-One printers, CD/DVD/ZIP drives, MP3 players, printers and digital cameras.*

- **Smart utility for easy device management.**The Hi-Speed USB device server comes with "SX Virtual Link" which allows you to visually manage all of your networked USB devices in one window. You can remotely know the connected device availability in your LAN on a realtime basis. You can also use the USB device application software as if it were directly connected to your PC.

- **Print server functionality.** Turn your SX-2000U2 USB device server easily into a true print server. Simply print from your application like you normally do. The bundled utility SX Virtual Link can be set to connect to the printer and send the job automatically, while still ensuring that the printer will become available for another user's print job or functions (e.g. scanning or storing with AIO printer).

Networking example

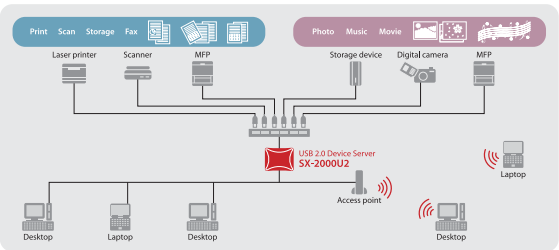

Specifications

! Macintosh compatible !

Supported Operating Systems	Windows 2000/XP, MacOS 10.2.7 or higher
Supported protocol	TCP/IP
Device interface	USB 2.0 Hi-Speed (A-Type) x 1
Network interface	10 BASE-T / 100 BASE-TX (Auto-detection)
Total number of USB interface connections	15 (including USB hub)
Configuration	Web browser, Quick Setup, telnet
Languages (Installation utility)	English, German, French, Italian, Spanish, Portuguese, Chinese, Japanese
Power supply	Universal AC adapter (AC100 - 240V)
Power consumption	5W (DC5V 1.0A)
Warranty	2 years
Regulatory approvals	FCC, CE, VCCI Class B
Package contents	SX-2000U2, Setup Guide, AC adapter, Warranty booklet, CD-ROM with configuration utilities and PDF manuals
Dimensions	3.1 x 3.9 x 1.1 in / 80 x 100 x 28 mm
Weight	3.5 oz / 100 g

*Does not support USB devices using isochronous data transfer over USB, such as web cameras and speakers.

*Some USB devices may not be supported depending on the USB device driver specification. Please visit our web site for the latest compatibility information.

SILEX TECHNOLOGY is a registered trademark of SILEX TECHNOLOGY, Inc. Other company or product names may be trademarks or registered trademarks of their respective owners.
Technical information and specifications are subject to change without notice. © 2008 SILEX TECHNOLOGY EUROPE GmbH. All rights reserved.

Global sales & support:

Europe Office
SILEX TECHNOLOGY EUROPE GmbH
+49-2159-6750-10
Cost-free Hotline Germany:
0800-7453938 (SILEX EU)
www.silexeurope.com
> contact@silexeurope.com

Corporate Headquarters
SILEX TECHNOLOGY, Inc.
+81-774-98-3782
www.silex.jp
> support@silex.jp

US Office
SILEX TECHNOLOGY AMERICA, Inc.
+1-801-747-0656
Cost-free Hotline USA:
866-765-8761
www.silexamerica.com
> contact@silexamerica.com

China Office
SILEX TECHNOLOGY BEIJING, Inc.
+86-10-8497-1430
www.silex.com.cn
> contact@silex.com.cn

SX200U22008EN

SX-2000WG+

Wireless/Wired Hi-Speed USB Device Server 11g

!Now Supports Isochronous Devices!

Provides instant Wi-Fi access to your Hi-Speed USB Devices

Ultimate Freedom to Remotely Use Your USB Devices

Features & benefits

- **Instantly Convert Your USB Devices to a Shared Resource on Your 802.11g/b WLAN.** The Hi-Speed Wireless USB Device Server provides 802.11g/b wireless or 10/100 Base-TX wired LAN connectivity for USB 2.0 Hi-speed devices. It instantly converts the connected device(s) for access anywhere on your wireless LAN. Now you can enjoy the convenience and freedom of remotely using multifunction printers, scanners, storage devices, or various other USB devices*. It brings flexibility and productivity of USB devices to a whole new level.

- **Easy Wireless Configuration with Microsoft Windows Connect Now.** The SX-2000WG+ supports Microsoft Windows "Connect Now"**. It simplifies the complicated wireless LAN initial configuration. The process is very easy. Use the Windows XP Connect Now wizard, save the results on your USB flash-tumb drive, then insert the thumb drive to the device server. The Server creates the wireless configuration automatically in a few minutes. Alternatively, the Hi-Speed Wireless USB Device Server can be configured over a wired LAN connection.

Networking example

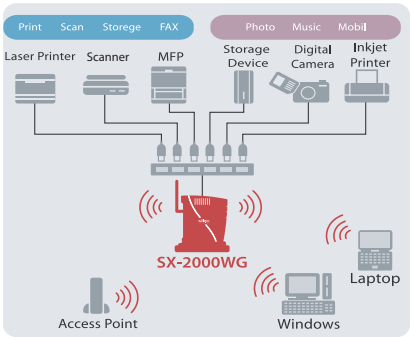

*SILEX **SX-Virtual Link** allows you to see what devices are available across your LAN on a real time basis. You can also set your individual USB device application software to be launched automatically when the device is connected to your PC.*

Technical Specifications

! Macintosh compatible !

Supported Operating Systems	Windows 2000/XP, Windows Vista, MacOS 10.2.7 or higher
Supported protocols	TCP/IP
Printer interface	USB 2.0 Hi-Speed (A-Type) x 1
Network interface	IEEE802.11b/g wireless (1M/2M/5.5M/11M/24M/36M/54M Auto-detection) 10 Base-T / 100 Base-TX (Auto-detection)
Wireless Security	WEP(64/128), SSID, WPA-PSK(TKIP/AES)
Total number of USB interface connections	15 (including USB Hub)
Configuration	Web browser, Quick Setup, telnet
Languages (Installation utility)	English, German, French, Italian, Spanish, Portuguese, Chinese, Japanese
Power supply	Universal AC adapter (AC100 - 240V)
Power consumption	9W (DC5V 1.8A)
Warranty	2 years
Regulatory approvals	FCC, CE, VCCI Class B
Package Contents	SX-2000WG, Setup Guide, AC adapter, Warranty booklet, CD-ROM with configuration utilities and PDF manuals, Antenna, Stand
Dimensions	36 x 140 x 143 mm (excl. Antenna & Stand) 1.4 x 4.5 x 5.4 in (excl. Antenna & Stand)
Weight	172g / 5.6 oz (excl. Antenna & Stand)

*Some USB devices may not be supported depending on the USB device driver specification. Isochronous support is limited to USB 2.0 full-speed only. Please visit our web site or contact silex technical support center for the latest compatibility information.

**Supported only with Windows XP Service Pack2 or greater.

SILEX TECHNOLOGY is a registered trademark of SILEX TECHNOLOGY, Inc. Other company or product names may be trademarks or registered trademarks of their respective owners.
Technical information and specifications are subject to change without notice. © 2008 SILEX TECHNOLOGY EUROPE GmbH. All rights reserved.

Global sales & support:

Europe Office
SILEX TECHNOLOGY EUROPE GmbH
+49-2159-6750-10
Cost-free Hotline Germany:
0800-7453938 (SILEX EU)
www.silexeurope.com
> contact@silexeurope.com

Corporate Headquarters
SILEX TECHNOLOGY, Inc.
+81-774-98-3781
www.silex.jp
> support@silex.jp

US Office
SILEX TECHNOLOGY AMERICA, Inc.
+1-801-74-1199
Cost-free Hotline USA:
866-765-8761
www.silexamerica.com
> contact@silexamerica.com

China Office
SILEX TECHNOLOGY BEIJING, Inc.
+86-10-6440-3958
www.silex.com.cn
> contact@silex.com.cn

SX2000WG+2008EN

SX-200 series
Wireless/Wired
2 Port Print Servers USB/Parallel

The SILEX SX-200 series contains two Print Servers:	
	1 Port USB 2.0 + 1 Port Parallel
Wired modell	SX-200-0213
Wireless/Wired modell	SX-200-1213

Easily Share your USB and Parallel Printers wirelessly or wired on your Local Area Network

High Performance

With the innovative SX-200 print servers, you can take advantage of your printer's maximum speeds. It can increase user productivity by shortening print waiting times, and the high performance architecture also reduces network congestion because the print jobs move out of the printer queue and off the network quicker. The wireless version includes a dual-band (2.4/5GHz) tri-mode 802.11a/b/g wireless radio allowing you to connect at the maximum speed of your wireless network on the frequency bands with the least amount of traffic.

Cost Reduction & Flexibility

The two models offer you the best of both worlds; low costs per port and the flexibility to place the print server at a secure, easy to administrate spot. With two ports in one device you significantly reduce the cost on a per printer basis. Needing just one network connection and one network address for both printers, the SX-200 helps you save even more money.

Security

The SX-200 print servers include enterprise-level security features including access control lists, complete protocol and application enable/disable control, read and write configuration passwords, and SNMP community name configuration. The wireless model also adds 802.1x EAP with TLS, TTLS, LEAP, PEAP or FAST; Open System or Shared Key support with WEP encoding; WPA (Wi-Fi Protected Access) Personal (WPA-PSK) and Enterprise modes, which utilize improved encryption via the TKIP; and WPA2, which adds Advanced Encryption Standard (AES).

Versatile

The SX-200 allows you to print from multiple computer and network operating systems simultaneously, including Windows, UNIX, Linux, Solaris, Netware, Macintosh, OS/2, DEC LAT, and more. The USB 2.0 Hi-Speed port connects virtually any USB printer including those with USB 1.1, USB 2.0 Full Speed, and USB 2.0 Hi-Speed connections. The IEEE1284 parallel port is compatible with virtually any parallel printer port mode including High Speed ECP with bi-directional communication. The SX-200 Wireless model lets you take advantage of your existing wireless infrastructure giving you flexible printer deployment where running cables is impractical or too expensive, or where the printer must be frequently moved. The dual band tri-mode radio gives you the ability to access your printer via 802.11a,802.11b, and 802.11g wireless local area networks. A printer mounting kit, a desktop mounting kit, and the USB cable are included.

Easy to Use

The SX-200 is easy to use with many different options for configuration and management. The included ExtendView Windows utility includes wizards for setup, configuration and management of multiple SILEX print servers at the same time. The SX-200 built-in web browser interface allows monitoring and configuration from any computer with a standard web browser.

Support

Just like all of our SILEX products, we offer cost-free technical lifetime support for the SX-200 print servers.

SX-200 series

Easily Share your USB and Parallel Printers wirelessly or wired on your Local Area Network

Specifications

Device Interfaces		- USB 2.0 Hi-Speed port - 1284-A-compatible bi-directional Parallel port
Network Interfaces		- 10Base-T/100Base-TX (Auto-detection) - IEEE 802.11a/b/g (with SX-200-1213 only)
Protocols	TCP/IP	- Supports: - lpr/lpd network printing protocol - Raw printer port (for example, Port 9100) - NetBIOS over IP and NetBEUI - Telnet and ftp - SNMP MIB I & II - IPP protocol (Internet printing) - Peer-to-peer printing (direct printing) via the Microsoft DLC - TCP/IP or IPX/SPX protocols with ExtendNet Connect
	AppleTalk	Supports: - Macintosh System 6.X, 7.X, 8.X, 9.X, MacOS 10.X - Apple LaserWriter driver 8.X and above (PostScript printer required) - PostScript-compatible laser printers - Most HP, Epson, and Canon inkjet printers
	IPX/SPX	- Simultaneously supports: Novell NetWare, NDS & NDPS - Supports: - NDPS via Novell's Generic Gateway or HP's Printer Gateway - Packet signatures, checksums and aliasing - Dedicated print server and remote printer modes - Encrypted passwords - Up to eight file servers and up to 32 queues - Automatic file server reattachment
	DEC LAT	Supports Opem VSM
Other Features		- LED's to indicate power-on, link, activity - lpd-Plus virtual printer capability (allows complex user- defined setup and reset strings configurable on a per- service basis) - Text-to-PostScript conversion on a per-service basis - Programmable character string conversion - IP security (ability to restrict access to print server based on IP address) - Configurable TCP port numbers on a per-service basis - IP address configuration via arp, rarp, DHCP, BOOTP, silex ExtendView, HP JetAdmin/Web JetAdmin, NetWare, and DEC MOP - Automatic detection of NetWare frame type or frame type can be forced AppleTalk "spoofing" for support of non-bidirectional PostScript printers - AppleTalk binary printing (requires that printer supports the HP Tagged Binary Communications Protocol or can be forced into binary mode) - Sophisticated diagnostics, including protocol trace capability

Print Server Management Tools	Enterprise Management Tools	Supports: - PC-based SNMP applications (For example, HP OpenView, IBM NetView and Sun SunNet Manager) - Private MIB
	LAN Administration Tools	ExtendView Utilities – SILEX utilities which provide simple configuration and management capabilities. - ExtendView also displays system, network and printer status information via SNMP traps - ExtendView for: - TCP/IP - NDS (snaps into Novell NWAdmin) - NetWare - UNIX (Linux 2.0.34, Solaris 2.6, SunOS 4.1.3, HPUX 10.20) - NetworkAlert™ Utilities – SILEX utilities which assist in managing network printers by proactively alerting you of printer problems via SNMP traps. Integrates into ExtendView for advanced diagnostic and configuration information - XAdmin32, XAdmin – Compatibility with legacy SILEX Print Server Administration utilities - WebXAdmin – Web Browser allows print server configuration and management HP JetAdmin and HP - Web JetAdmin – allows print server configuration and management Novell ManageWise
	User Printing Status and Monitoring	- HP JetAdmin and Web JetAdmin for printer and print server status information - WebXAdmin for printer and print server status information
Security		- 802.1x, EAP-TLS, EAP-TTLS, EAP-LEAP, EAP-PEAP, EAP-FAST - SSL for secure HTTPS and STelnet configuration - Encrypted Printing with AES, 3DES, Twofish - Access Control Lists
Wireless Security Wireless Features (SX-200-1213 only)		- Variable data rates up to 54 Mbps - Frequency band: 2.4/5 GHz - WPA and WPA2 (personal and enterprise modes) - WEP: 128-bit, 64-bit (compatible with 40-bit), none - Reverse PIN SMA L-type swivel dipole dual band antenna
Power consumption		1A @ 12VDC
Dimensions		140mm x 104mm x 32mm (without antenna)
Weight		224g

Networking example

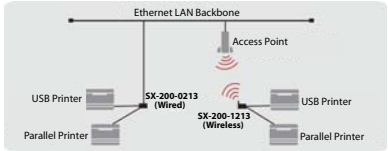

Order No. Wired Print Server: SX-200-0213
Order No. Wireless/Wired Print Server: SX-200-1213

SILEX TECHNOLOGY is a registered trademark of SILEX TECHNOLOGY, Inc. Other company or product names may be trademarks or registered trademarks of their respective owners.
Technical information and specifications are subject to change without notice. © 2008 SILEX TECHNOLOGY EUROPE GmbH. All rights reserved.

Global sales & support:

Europe Office
SILEX TECHNOLOGY EUROPE GmbH
+49-2159-6750-10
Cost-free Hotline Germany:
0800-7453938 (SILEX EU)
www.silexeurope.com
> contact@silexeurope.com

Corporate Headquarters
SILEX TECHNOLOGY, Inc.
+81-774-98-3782
www.silex.jp
> support@silex.jp

US Office
SILEX TECHNOLOGY AMERICA, Inc.
+1-801-747-0656
Cost-free Hotline USA:
866-765-8761
www.silexamerica.com
> contact@silexamerica.com

China Office
SILEX TECHNOLOGY BEIJING, Inc.
+86-10-8497-1430
www.silex.com.cn
> contact@silex.com.cn

SX2002008EN

silex technology

SX-500 series
Wireless/Wired Serial Device Servers

The SILEX SX-500 series contains two Serial Device Servers:	
Wired model	SX-500-0033
Wireless/Wired model	SX-500-1033

Network your Serial Devices Wirelessly or via Ethernet

Flexible
The SX-500 serial server family allows sharing serial devices on ethernet or wireless networks. The series contains one wired model and one wireless/wired model, that provides 802.11g WLAN connectivity in addition to the Ethernet. The provided Serial Port Emulator software allows easy integration with existing PC applications.

Secure
The SX-500 serial servers include enterprise-level security features including access control lists, read and write configuration passwords, and SNMP community name configuration. The wireless/wired model also adds 802.1x authentication EAP with TLS, TTLS, LEAP, PEAP or FAST. It supports Open System or Shared Key with WEP encoding as well as WPA (WPA-PSK) and Enterprise modes, which utilize improved encryption WPA2 with TKIP and AES.

Rugged
The enclosure is made of rugged pre-plated galvanized steel with an IP40 industrial-grade rating. Side flange mounts allow for permanent installation on virtually any surface. The unit can withstand electrostatic discharges as high as 15 kV at the serial connector.

Application examples
- Industrial Automation
- Building Automation
- Medical Devices
- Transportation/ Logistics
- Access Control
- POS (Points of Sale)
- LED signs
- Serial Printers
- M2M and SCADA applications
- Virtually any other products with a Serial Port

Network your Serial Devices Wirelessly or via Ethernet

Specifications

Device Interface	Single serial port: RS-232
Network Interfaces	- IEEE 802.3i (10Base-T) + 802.3u (100Base-TX) - IEEE 802.11b/g (SX-500-1033 only)
Supported Protocols	- TCP, Telnet, ICMP, SNMP, DHCP, BOOTP, Auto IP, HTTP, SMTP, TFTP, SLP, DNS, Dynamic DNS
Configuration	- Web browser, ExdendView - Console accessible via serial port or Telnet
Power supply	Provided power adapter or through Pin 9
Power consumption	- Wired usage: 500 mA @ 5 VDC - Wireless usage (SX-5001033 only): 800 @ 5 VDC
Regulatory approvals	CE, EMC standards
Dimensions	125 x 75 x 24 mm
Weight	330 g
Other Features	- Serial Port Emulator software - ExtendView Utility (GUI) - Simple Network Management Protocol (SNMP) MIB I + II; IP - Firmware upgrade via TCP/IP (master mode TFTP, slave mode TFTP, or BOOTP); multiple servers may be downloaded simultaneously
Wireless Security Wireless Features (SX-500-1033 only)	- Security: WPA and WPA2 (personal and enterprise modes), PAP, MS-CHAPv2, 802.1x EAP with TLS/TTLS/ LEAP/PEAP/FAST, WEP - Variable data rates: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2 and 1 Mbps - Frequency band: 2.4 GHz ISM Band

Wireless/Wired Serial Device Servers

SX-500 series

Easy to Manage

In addition to a built-in web browser interface, silex provides ExtendView, a Windows utility for easy configuration and management. A console accessible via Telnet or the serial port is available for more sophisticated diagnostics and configuration. The SX-500 series is also compatible with the Simple Network Management Protocol (SNMP) for compatibility with most popular network management systems. The included Serial Port Emulator software allows you to configure virtual serial ports on a Windows system (for example, COM3) that redirect all of the data out to the silex serial servers on your network allowing you to continue use of your current applications.

SILEX facts

SILEX TECHNOLOGY can look back on more than 30 years of experience and quality. Many leading manufacturers of IT peripherals make use of technology from SILEX TECHNOLOGY and provide this as an OEM (Original Equipment Manufacturer) component for their own products. Products like print servers, USB device servers or serial device servers as well as biometric products or a unique wireless iPod solution offer you your own choice of SILEX products to explore their advantages and experience the quality leading manufacturers have been trusting for many years.

SILEX also provides outstanding customer service. SILEX TECHNOLOGY offers unlimited support for each and every SILEX product. For high-quality products as these, this is an easy task. But furthermore the service is free and available to our customers through the following communication channels: free telephone support, e-mail support as well as online support. The online support function is available in situations that require additional effort. In this case, the SILEX support technician connects remotely to your system and shows you directly on your display how to implement the solution. You can also at any time participate in the ongoing development of SILEX products. Firmware upgrades are available to you for downloading from our website free of charge.

Network example

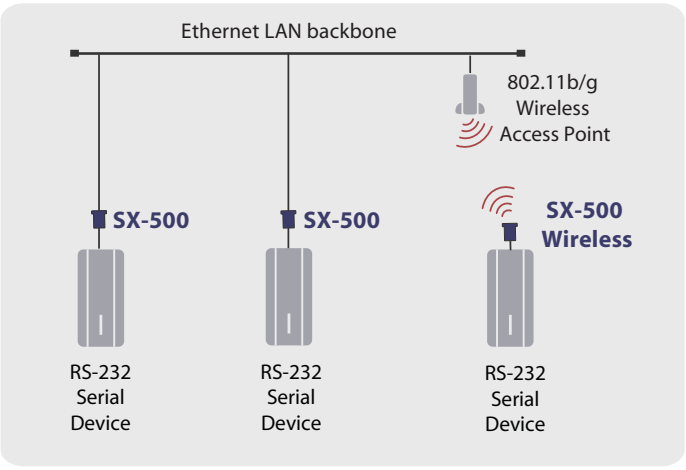

Order No. Wired Serial Device Server: SX-500-0033
Order No. Wireless/Wired Serial Device Server: SX-500-1033

SILEX TECHNOLOGY is a registered trademark of SILEX TECHNOLOGY, Inc. Other company or product names may be trademarks or registered trademarks of their respective owners.
Technical information and specifications are subject to change without notice. © 2008 SILEX TECHNOLOGY Europe GmbH. All rights reserved.

Global sales & support:

Europe Office
SILEX TECHNOLOGY EUROPE GmbH
+49-2159-6750-10
Cost-free Hotline Germany:
0800-7453938 (SILEX EU)
www.silexeurope.com
> contact@silexeurope.com

Corporate Headquarters
SILEX TECHNOLOGY, Inc.
+81-774-98-3782
www.silex.jp
> support@silex.jp

US Office
SILEX TECHNOLOGY AMERICA, Inc.
+1-801-747-0656
Cost-free Hotline USA:
866-765-8761
www.silexamerica.com
> contact@silexamerica.com

China Office
SILEX TECHNOLOGY BEIJING, Inc.
+86-10-8497-1430
www.silex.com.cn
> contact@silex.com.cn

Wireless Ethernet Adapter-Office

SX-2500CG

Easily add 802.11b/g wireless capabilities to any Ethernet product

SX-2500CG

Make it wireless

The Wireless Ethernet Adapter SX-2500CG provides wireless LAN connectivity to any existing device with 10/100BASE-TX wired LAN ports. It is a simple and easy way to connect not only printers and PCs but also network cameras, POS terminals, measuring instruments or surveillance cameras that have wired LAN ports, to wireless LANs.
The SX-2500CG works with any Ethernet-enabled device, so there is no need for drivers or extra software. It supports existing network utility software without compromise.

Convenience of Wireless Connectivity for All Kinds of Network Devices

Product Overview

1. Easy to configure

The SX-2500CG is a cost-effective Ethernet-to-Wireless bridge that can easily be configured using the cross-over cable included in the package. No need to configure an IP address, the SX-2500CG comes with a DHCP server and automatically assigns an address that will enable communication between computer and bridge. A special web-based Setup Assistant makes it more user-friendly than ever to configure the bridge in 3 simple steps:

1) Choose your preferred wireless network from a list of available access points
2) Enter the network key (if any)
3) Complete the configuration by submitting to the device

2. Simple operation and freedom

Once the SX-2500CG is configured, it can be connected to any Ethernet device. It is platform and Operating System independent, so you don't need any drivers or additional software. This allows you to take advantage of all of the functionality of your networked product by bridging it to the wireless network— making it ideal for applications such as printer and status monitoring, network scanning, and industrial control or status monitoring. Nothing needs to be changed on your Ethernet device in order to make it wireless when using the SX-2500CG.

3. Robust wireless security

The SX-2500CG includes office-level security features including Open System or Shared Key support with Wired Equivalent Privacy (WEP) encoding; WPA (Wi-Fi Protected Access) Personal (WPA-PSK) with a choice of TKIP or AES encryption methods and WPA2, which adds Advanced Encryption Standard (AES) to encryption. * To use these programs, the access point needs to support them as well.

4. Other features

Additional capabilities of the SX-2500CG include:

- Supports existing network utility software without compromise
- Supports networked scanning facilities wirelessly
- Ethernet pass-through means that the it works with any security already provided by your Ethernet enabled device
- Once configured, the SX-2500CG is platform independent so it will work with any operating system and any network device

Specifications

Netzwork I/F	10BASE-T/100BASE-TX (automatic detection)
Wireless LAN	IEEE 802.11 b/g
Wireless Security	WEP (64/128), SSID, WPA-PSK (TKIP/AES), WPA2-PSK (AES)
Weight	170 g (antenna and stand not included)
Outer Dimensions	W: 36mm x D: 114 mm x H: 138 mm (antenna and stand not included)
Power Consumption	AC adapter AC 100-240 V, 50/60Hz
Certifications	VCCI Class-B, FCC Class-B, CE Class B
Max. Power Usage	9 W (DC 5 V 1.8A)
Enclosed Items	SX-2500CG, Setup Guide, Warranty, AC adapter, rubber feet, stand for vertical placement, crossover cable (1,5 m)

SILEX facts

SILEX TECHNOLOGY is a 30-year developer of external and embedded device-device connectivity products. SILEX has become the worldís #1 supplier of embedded wired and wireless connectivity products over the past 10 years, helping global OEMs improve the way they move information. SILEX advantages for OEMs include a support team, industry-leading software solutions like our NSS security suite, and exceptional Japanese quality manufacturing.

Order No.: SX-2500CG

ISO 9001 JQA-QMA2667 SILEX TECHNOLOGY, Inc.

ISO 14001 JQA-EM3813 SILEX TECHNOLOGY, Inc. Design & Manufaktur Center

SILEX TECHNOLOGY is a registered trademark of SILEX TECHNOLOGY, Inc. Other company or product names may be trademarks or registered trademarks of their respective owners.
Technical information and specifications are subject to change without notice. © 2008 SILEX TECHNOLOGY EUROPE GmbH. All rights reserved.

Global sales & support:

Europe Office
SILEX TECHNOLOGY EUROPE GmbH
+49-2159-6750-10
Cost-free Hotline Germany:
0800-7453938 (SILEX EU)
www.silexeurope.com
> contact@silexeurope.com

Corporate Headquarters
SILEX TECHNOLOGY, Inc.
+81-774-98-37821
www.silex.jp
> support@silex.jp

US Office
SILEX TECHNOLOGY AMERICA, Inc.
+1-801-748-1188
Cost-free Hotline USA:
866-765-8761
www.silexamerica.com
> contact@silexamerica.com

China Office
SILEX TECHNOLOGY BEIJING, Inc.
+86-10-6440-3958
www.silex.com.cn
> contact@silex.com.cn

IPv6-IPv4 Converter

SX-2600CV

Convert to IPv6 at Low Cost with Ease.

Making Existing Network Devices Operable in IPv6 Environment

Overview

Using SX-2600CV will make IPv4 products operable in an IPv6 environment easily and inexpensively.

It is an external box that serves as a gateway for traditional IPv4-only devices by translating the IPv4 protocol to work over IPv6, expanding its communication range.

Since devices that support IPv4 only cannot be used in an IPv6 environment, IPv4 devices would need to be replaced, incurring expenses associated with administration, configuration, and operation.

Networking example

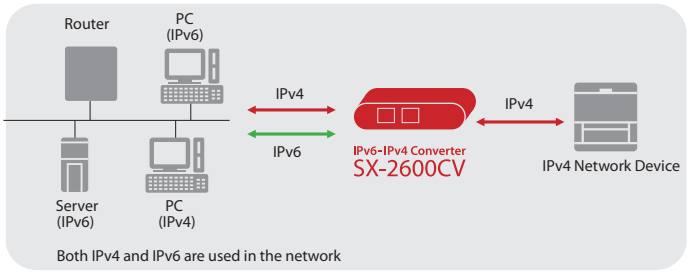

Both IPv4 and IPv6 are used in the network

Features

- Makes IPv4-only devices operable in an IPv6 environment.
- Can be used in environments that use both IPv6 and IPv4. Bridges protocols other than IPv6 and IPv4. *
- Superior quality, reliability, and support: both hardware and software are developed and manufactured by SILEX.
- Simple setup, simple operation. **

* Some protocols are not supported.
** Supports bulk configuration using a .csv file.

Specifications

Interfaces:	10BASE-T/100BASE-TX (auto detection) 2 ports *AUTO-MDI/MDIX supported
Certifications:	VCCI Class-B, FCC Class-B, CE Class-B
Includes:	Setup Guide, AC Adapter
Configuration Utility:	Web browser (supporting bulk configuration using a .csv file)

ISO 9001 JQA-2667 ISO 14001 JQA-EM3813

Order No. SX-2600CV

SILEX TECHNOLOGY is a registered trademark of SILEX TECHNOLOGY, Inc. Other company or product names may be trademarks or registered trademarks of their respective owners.
Technical information and specifications are subject to change without notice. © 2008 SILEX TECHNOLOGY Europe GmbH. All rights reserved.

Global sales & support:

Europe Office
SILEX TECHNOLOGY Europe GmbH
+49-2159-6750-10
German toll free
0800-74539 38 (SILEX EU)
www.silexeurope.com
> contact@silexeurope.com

Corporate Headquarters
SILEX TECHNOLOGY, Inc.
+81-774-98-3782
www.silex.jp
> support@silex.jp

US Office
SILEX TECHNOLOGY America, Inc.
+1-801-747-0656
US toll free
866-765-8761
www.silexamerica.com
> contact@silexamerica.com

China Office
SILEX TECHNOLOGY Beijing, Inc.
+86-10-8497-1430
www.silex.com.cn
> contact@silex.com.cn

SX2600CV2008EN